

### Single hole earth point

| Hole size  | Length | Weight each | Part No. |
|------------|--------|-------------|----------|
| M8 x 15mm  | 80mm   | 0.14kg      | PC100-FU |
| M10 x 15mm | 80mm   | 0.14kg      | PC101    |
| M12 x 15mm | 80mm   | 0.14kg      | PC102    |
| M16 x 15mm | 80mm   | 0.14kg      | PC103    |

Stem diameter = 10.7mm (70mm<sup>2</sup>).



BS 7430

### Two hole earth point

| Hole size   | Length | Weight each | Part No. |
|---|--------|-------------|----------|
| M8 x 12mm   | 80mm   | 0.44kg      | PC115-FU |
| Supplied c/w front plate for connection of 25mm x 3mm copper tape or 70mm <sup>2</sup> stranded copper cable. |        |             | PC120    |
| M8 x 12mm   | 80mm   | 0.44kg      |          |
| Supplied c/w front plate for connection of 25mm x 3mm copper tape or 8mm diameter solid circular copper.      |        |             | PC125    |
| M8 x 12mm   | 80mm   | 0.28kg      |          |



BS EN 50164-1 Class H, BS 7430



Tightening torque 8Nm


### Four hole earth point


| Hole size | Length | Weight each | Part No. |
|-----------|--------|-------------|----------|
| M8 x 14mm | 75mm   | 0.41kg      | PC110    |

Stem diameter = 10.7mm (70mm<sup>2</sup>).



BS 7430

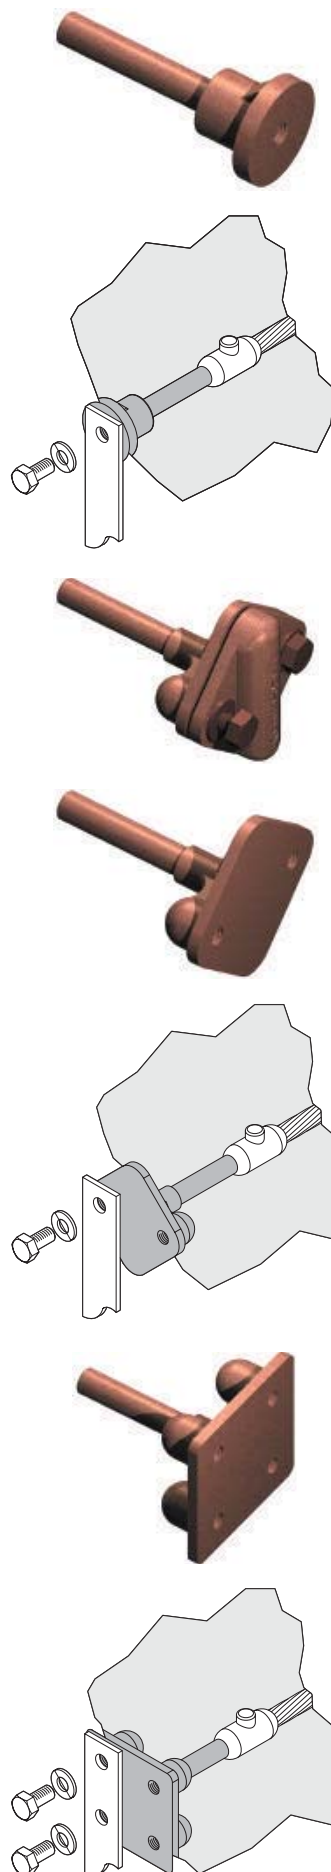

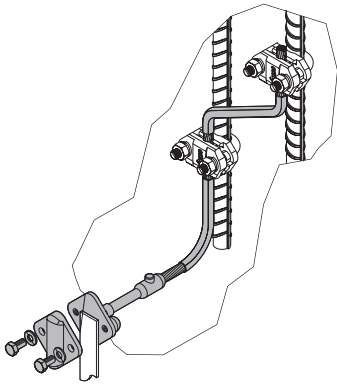

## Earth point with pre-welded tail

| Description   | Weight each | Part No.        |
|---|-------------|-----------------|
| As PC100-FU with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable | 0.56kg      | <b>PC105</b>    |
| As PC101 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 0.56kg      | <b>PC106</b>    |
| As PC102 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 0.56kg      | <b>PC107</b>    |
| As PC103 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 0.56kg      | <b>PC108</b>    |
| As PC110 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 1.14kg      | <b>PC111</b>    |
| As PC115-FU with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable | 0.84kg      | <b>PC116</b>    |
| As PC120 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 0.84kg      | <b>PC121</b>    |
| As PC125 with prewelded 500mm long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 0.84kg      | <b>PC126-FU</b> |


For earth points PC100-FU etc. please refer to page 89.



BS EN 50164-1 Class H, BS 7430



Tightening torque 8Nm



## **NEW** Earth point with double pre-welded tail

| Description   | Weight each | Part No.     |
|---|-------------|--------------|
| As PC110 but with 2 x 400mm prewelded long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 1.23kg      | <b>PC216</b> |
| As PC115-FU but with 2 x 400mm prewelded long tail of 70mm <sup>2</sup> PVC insulated earth cable | 1.26kg      | <b>PC211</b> |
| As PC120 but with 2 x 400mm prewelded long tail of 70mm <sup>2</sup> PVC insulated earth cable    | 1.26kg      | <b>PC221</b> |

For earth points PC110 etc. please refer to page 89.



BS EN 50164-1 Class H, BS 7430



Tightening torque 8Nm